

Blustyle
by COTTO D'ESTE

COUNTRY
LAND OF WOOD

Blustyle[®] | BELLA
PER
SEMPRE
by COTTO D'ESTE

COUNTRY
LAND OF WOOD






COUNTRY

LAND OF WOOD

Niente mi fa sentire "a casa" come vivere all'aria aperta, circondato dalla natura e dai suoi elementi. Il profumo della campagna, il tepore del sole o il freddo della neve, il contatto col legno, con la sua storia e il suo fascino fatto di dettagli, di nodi, crepe e scalfitture, di colori caldi e bruciati o più freddi e moderni. Country è tutto questo. Un legno coinvolgente, dall'aspetto volutamente antico e vissuto, accogliente e dal sapore fortemente naturale. Ho scelto tra i tre bellissimi colori fortemente stonalizzati che articolano la collezione: Aspen, chiaro e raffinato; Creek, grigio caldo, moderno e di tendenza; e Vermont, dai toni più caldi, elegante e di carattere. La ricchezza grafica e l'alta tecnologia produttiva ne fanno un gres porcellanato di grande realismo e dalle elevate prestazioni tecniche, resistente e facile da pulire.

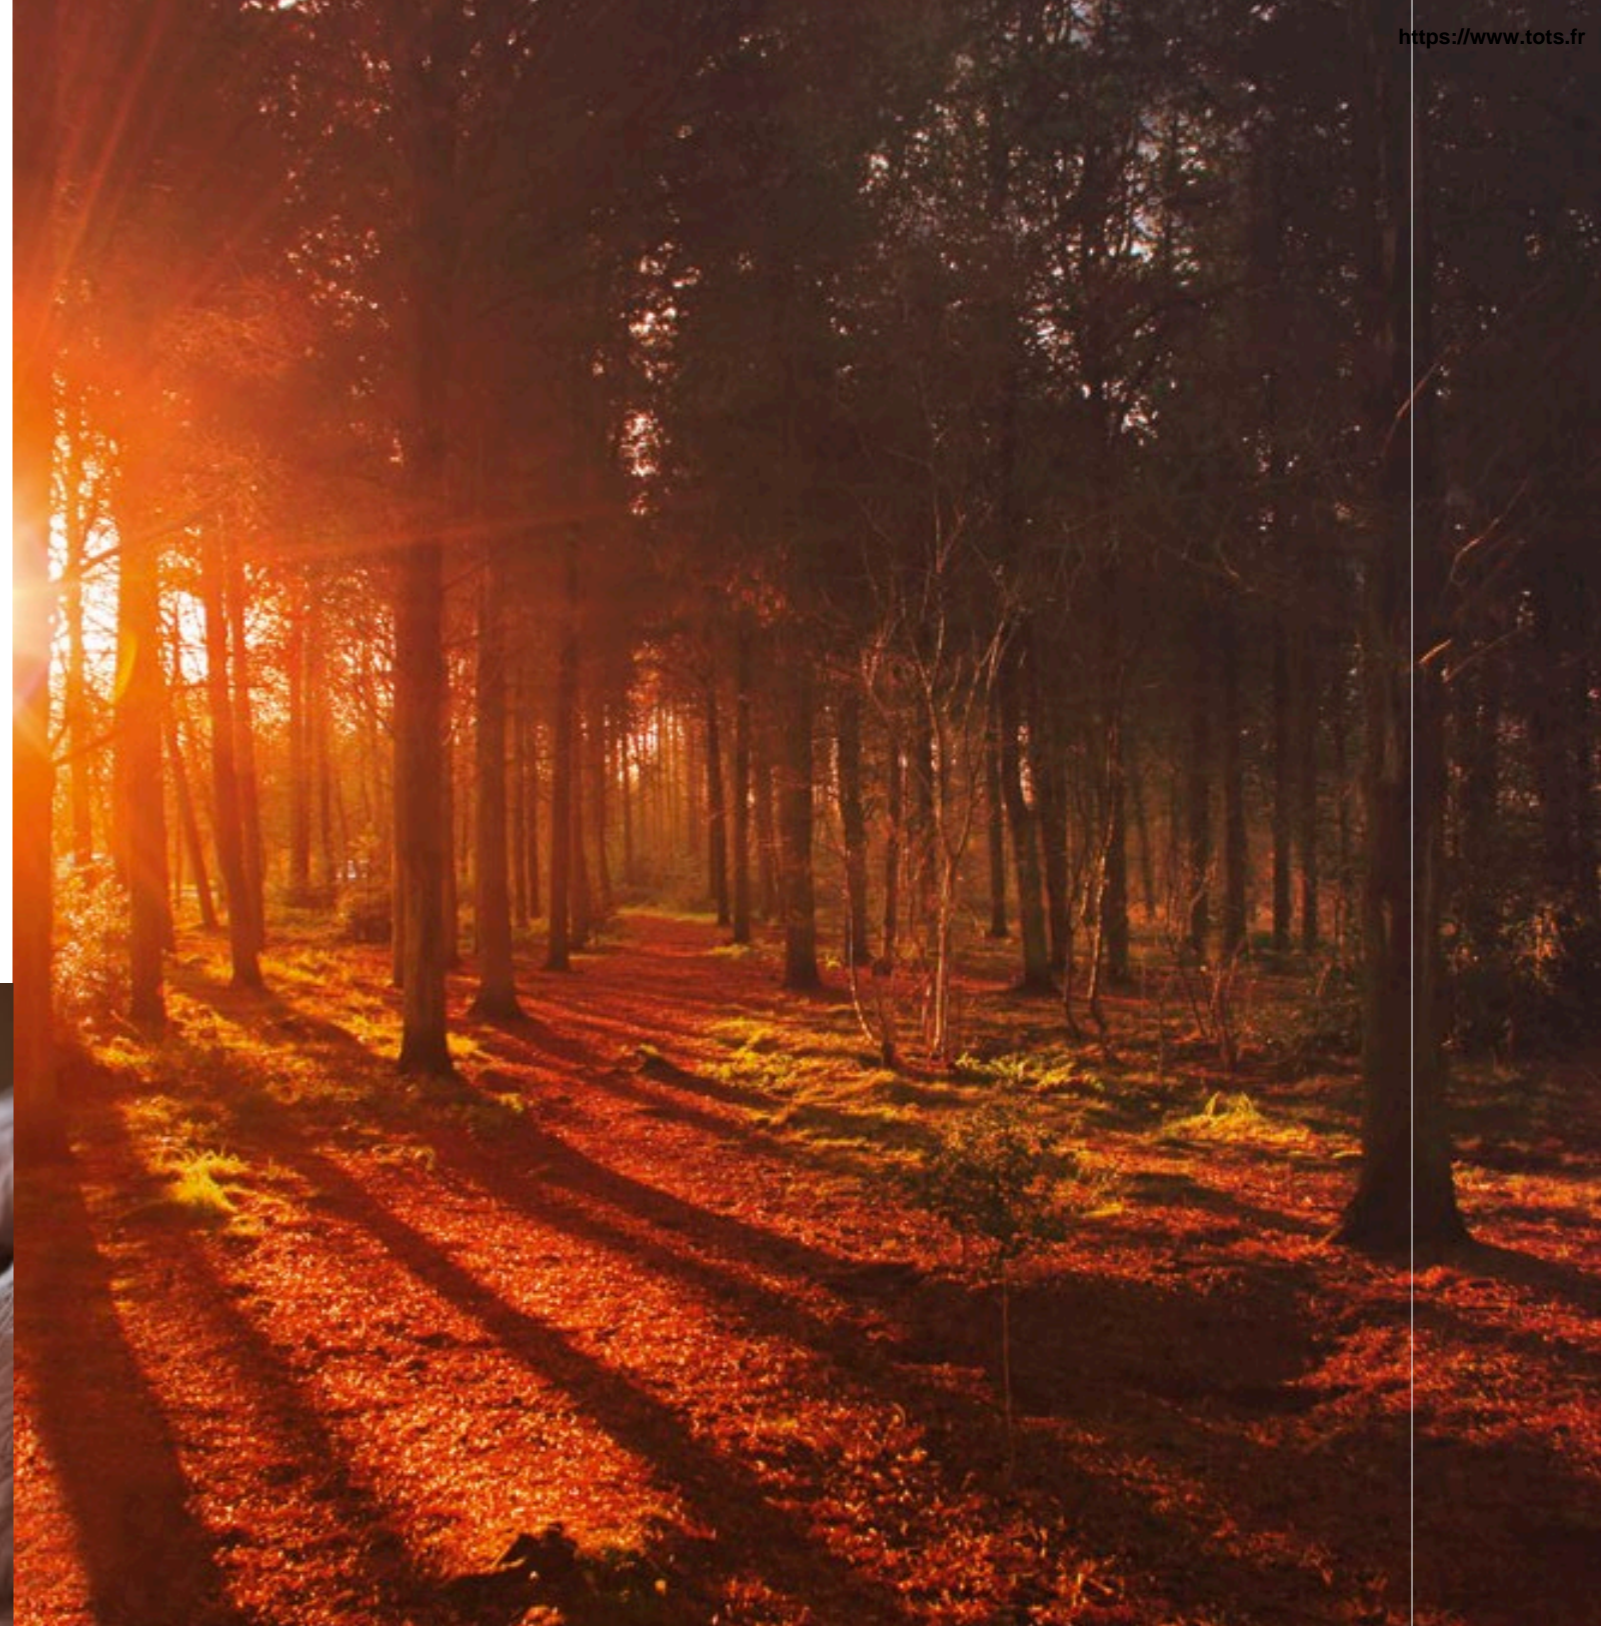

Blustyle
by COTTO D'ESTE

BELLA
PER
SEMPRE



Nothing makes me feel "at home" like living outdoors, surrounded by nature and its elements. The smell of the countryside, the warmth of the sun or the cold snow; contact with wood, with its history and charm formed of details, knots, cracks and nicks, warm and blazed colours or colder and modern tones. Country is all these things. A beautiful wood that is deliberately aged, welcoming and with a natural touch. I have chosen between three beautiful colours strongly shaded, which define the collection: Aspen, clear and refined; Creek, warm grey, modern and trendy; and Vermont, warmer, elegant tones with character. The rich graphics and high technology production process make them extremely realistic porcelain tiles with high technical performance, durable and easy to clean.




VERMONT
VERMONT-V2


CREEK
CREEK-V2

ASPEN
ASPEN-V2





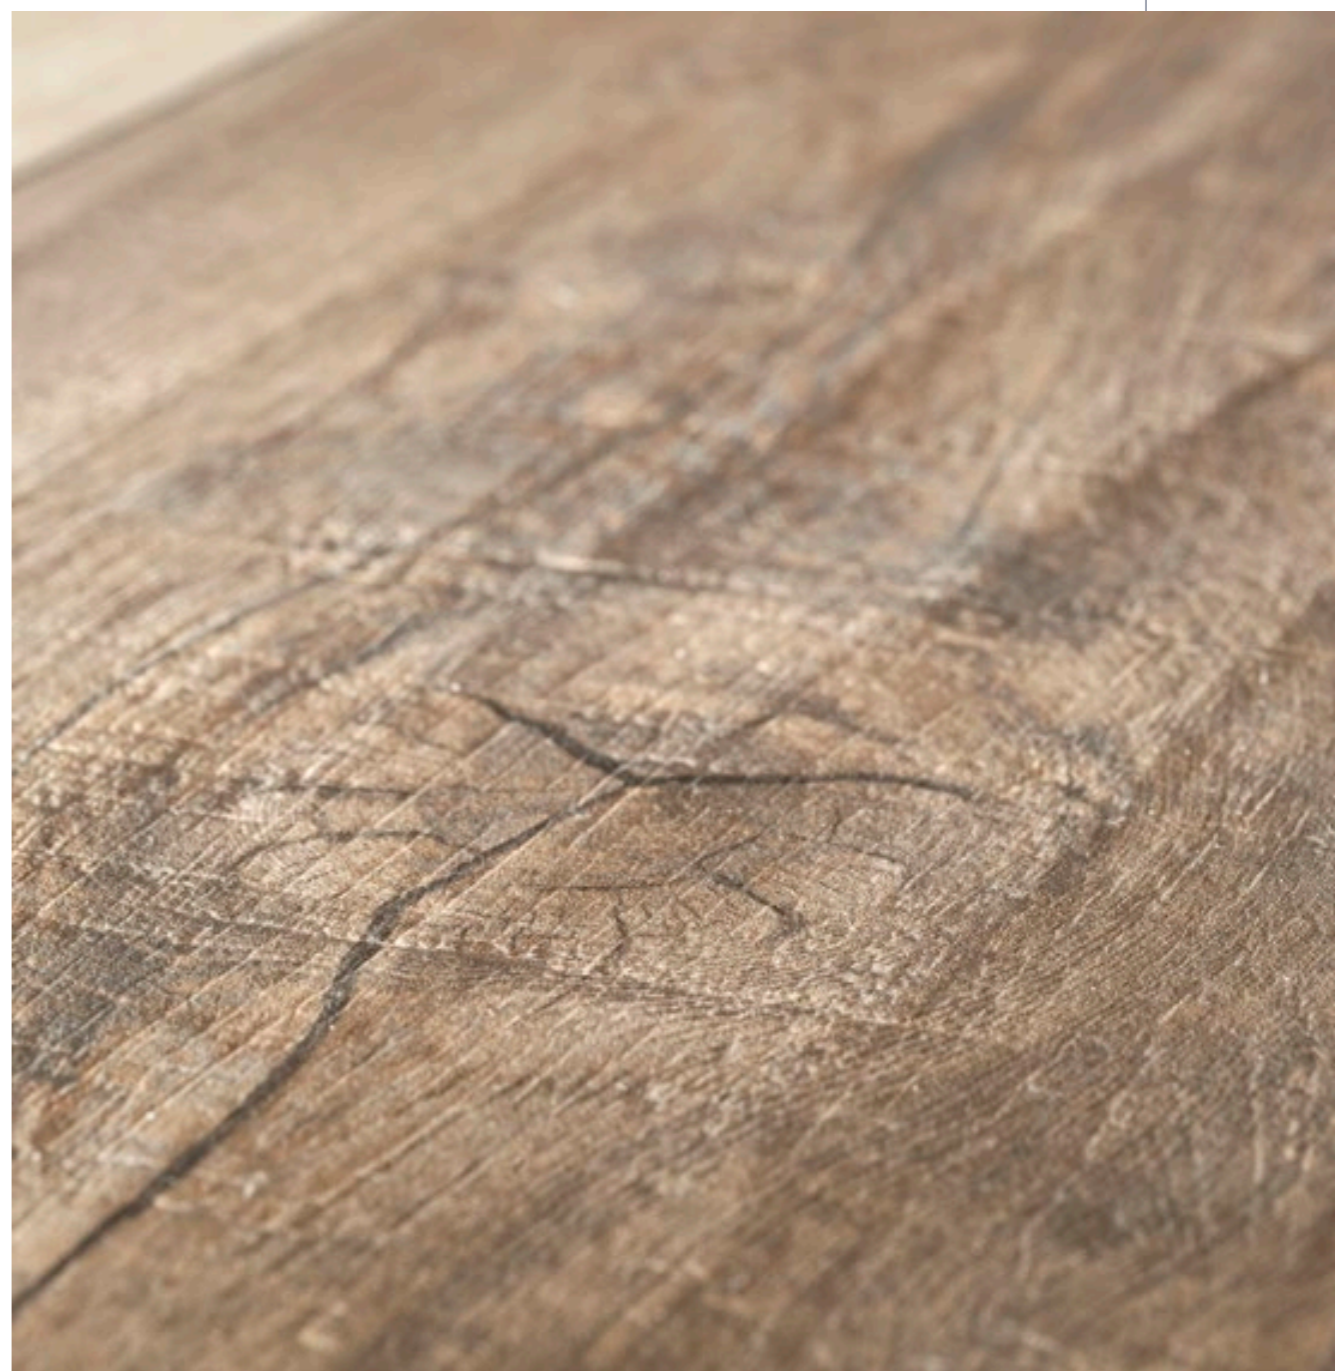

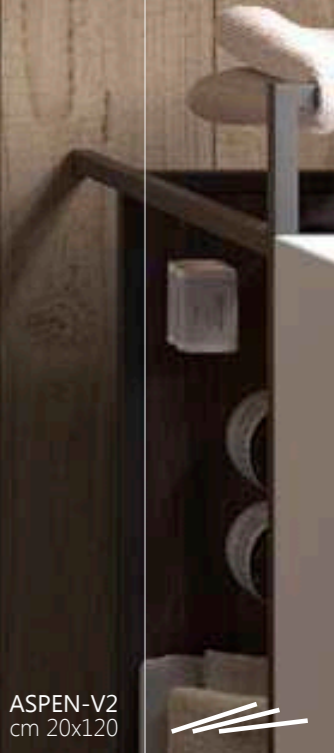





1973

1992








10 Lonsdale St.



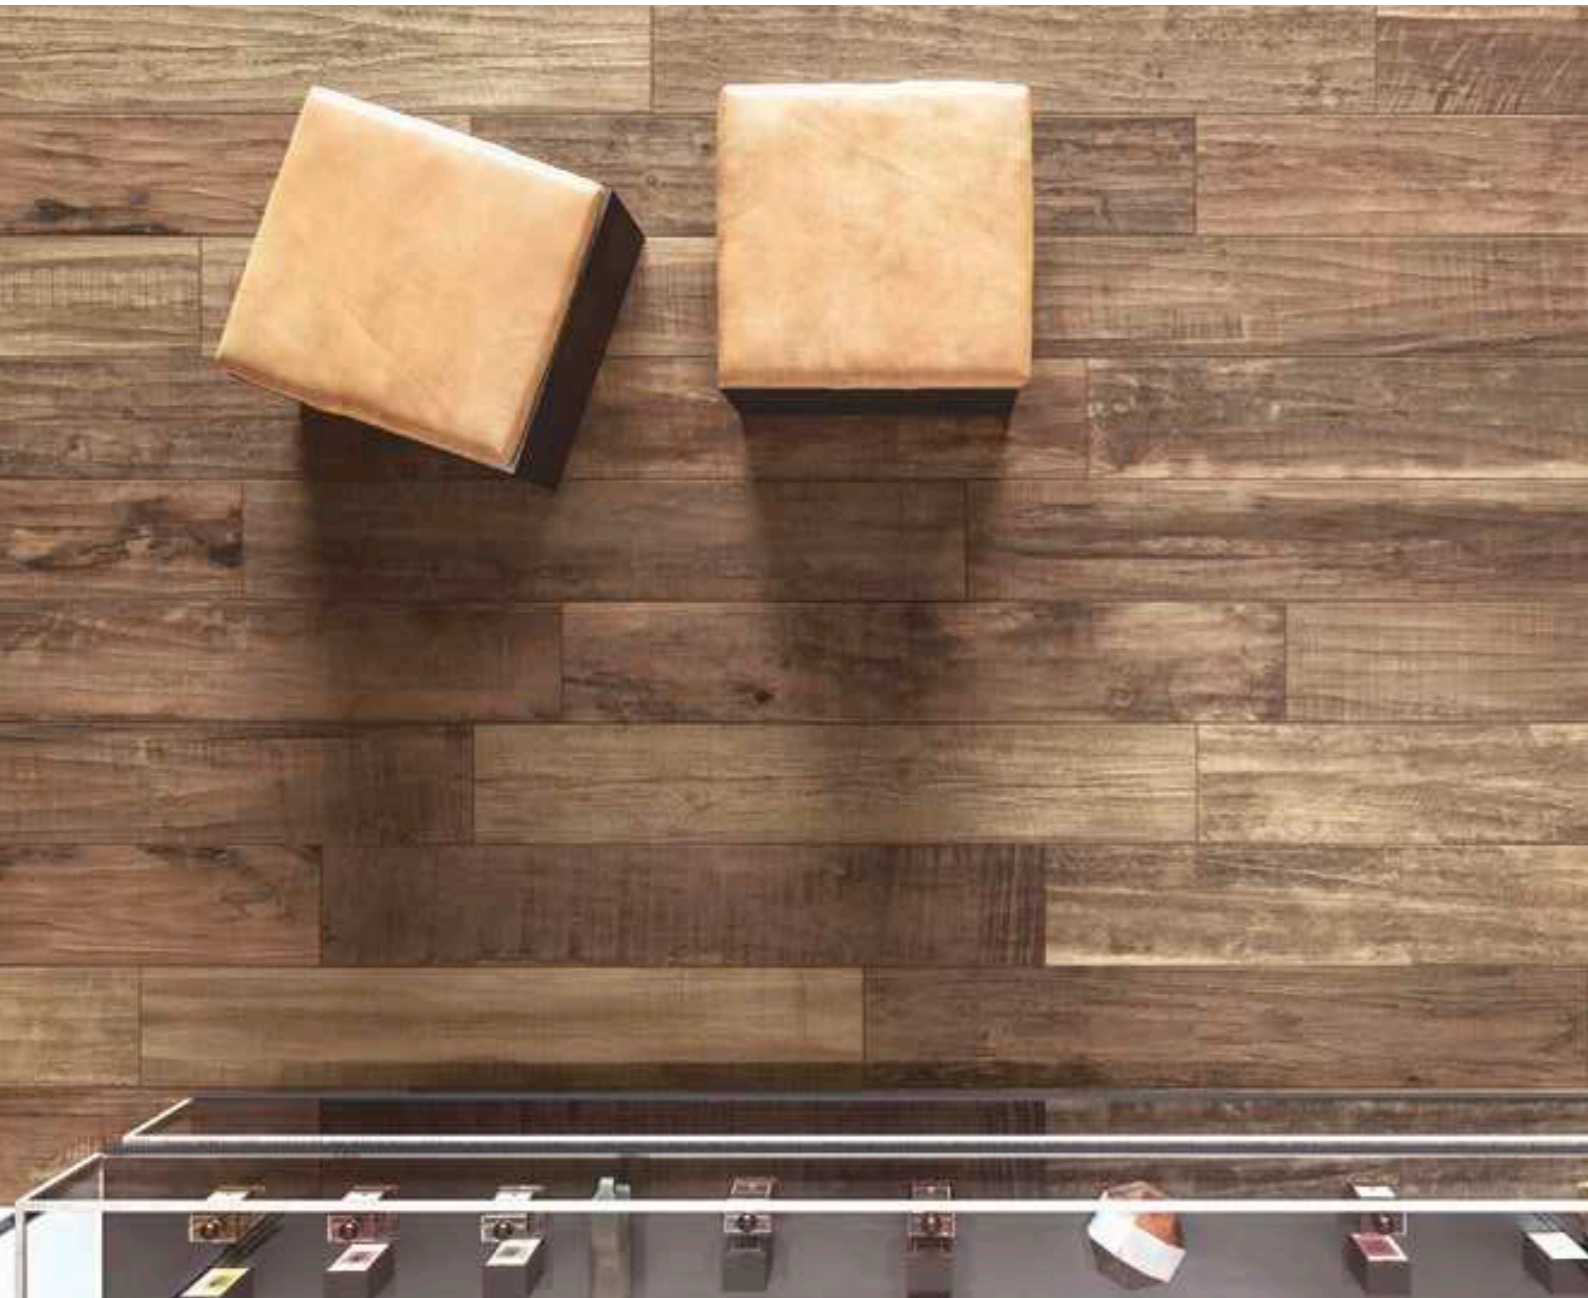









CREEK-V2
cm 20x120



TABELLE CALIBRI
SIZES TABLE

20x120	
CALIBRO CALIBRE	W*(mm)
S	198,8x1205,8
T	199,2x1208,2
X	199,6x1210,6
U	200,0x1213,0
A	200,4x1215,4
V	200,8x1217,8
B	201,2x1220,2

CARATTERISTICHE TECNICHE
TECHNICAL FEATURESRESISTENZA ALLO SCIVOLAMENTO
SLIPPERING RESISTANCE

DIN 51130	R10
DIN 51097	B (A+B)
BCR TORTUS	μ > 0,40
ANSI A326.3	DCOF ≥ 0.42
AS/NZS 4586	P3
UNE ENV 12633	Clase 2

CARICO DI ROTTURA (S) - Valore medio
BREAKING STRENGTH (S) - Average value

ISO 10545-4	2.500 N
ASTM C 648	600 lbf

ASSORBIMENTO D'ACQUA - Valore medio
WATER ABSORPTION - Average value

ISO 10545-3 / ASTM C 373	0,05%
--------------------------	--------------

RESISTENZA ALLA FLESSIONE - Valore medio
MODULUS OF RUPTURE - Average value

ISO 10545-4	50 N/mm²
-------------	----------------------------

RESISTENZA ALL'ABRASIONE PROFONDA - Valore medio
DEEP ABRASION RESISTANCE - Average value

ISO 10545-6 / ASTM C 1243	145 mm³
---------------------------	---------------------------

DILATAZIONE TERMICA LINEARE
LINEAR THERMAL EXPANSION

ISO 10545-8	α ≤ 7x10⁻⁶ °C⁻¹
ASTM C 372	α ≤ 4.4x10⁻⁶ °F⁻¹ / α ≤ 8x10⁻⁶ °C⁻¹

RESISTENZA ALLE MACCHIE
STAIN RESISTANCE

ISO 10545-14	5 RESISTENTE - 5 RESISTANT
ASTM C 1378	A RESISTANT

RESISTENZA ALL'ATTACCO CHIMICO
RESISTANCE TO CHEMICAL ETCHING

ISO 10545-13	LA-HA RESISTENTE RESISTANT *
ASTM C 650	A RESISTANT *

RESISTENZA AL GELO
FROST RESISTANCE

ISO 10545-12 / ASTM C 1026	RESISTENTE - RESISTANT
----------------------------	-------------------------------

REAZIONE AL FUOCO
FIRE REACTION

EN 13823	Classe/Class A1 (wall)
EN 9239-1	Classe/Class A1_f (floor)

FLAME SPREAD

ASTM E84	Class A
----------	----------------

CONDUCIBILITÀ TERMICA
THERMAL CONDUCTIVITY

EN 12524	λ = 1,3 W/m °K / 0.7 BTU/ft h°F
----------	--

STONALIZZAZIONE
DESHADING

ANSI A137.1	V4 ASPEN, CREEK, VERMONT
	V2 ASPEN-V2, CREEK-V2, VERMONT-V2

*No acido fluoridrico e derivati. / Not resistant to hydrofluoric acid and derivatives.

PULIBILITÀ
PULIBILITY

VISIBILITÀ DELLE IMPRONTE - Metodo Blustyle

Questa classificazione specifica il grado di visibilità delle impronte rilasciate sul pavimento dopo il passaggio con scarpe sporche di polvere.

A - Impronta non visibile

B - Impronta poco visibile

C - Impronta molto visibile. Ideale per rivestimenti e consigliato per pavimenti solo in ambienti residenziali.

TREAD MARK VISIBILITY - Blustyle method

This classification specifies the visibility degree of the tread marks left on the floor after walking with shoes dirty of dust.

A - Tread mark not visible

B - Tread mark not very visible.

C - Tread mark very visible. Ideal for wall installation and recommended for floor installation in residential areas only.

A

FACILITÀ DI PULIZIA - Metodo Blustyle

Il metodo consiste nel classificare il grado di facilità nella rimozione dello sporco generico mediante pulizia manuale con detergente debole.

Grado 1 - Molto facile, nessuna resistenza dello sporco, rimozione immediata.

Grado 2 - Facile, leggera resistenza dello sporco, rimozione veloce.

Grado 3 - Meno facile, maggiore resistenza dello sporco, rimozione lenta. Si consiglia detergente forte. Ideale per rivestimenti e consigliato per pavimenti solo in ambienti residenziali.

CLEANING EASINESS - Blustyle method

The method consists in classifying the easiness grade in removing general dirt by manual cleaning with mild detergent.

Grade 1 - Very easy, no resistance of the dirt, immediate removal.

Grade 2 - Easy, light resistance of the dirt, fast removal.

Grade 3 - Less easy, higher resistance of the dirt, slow removal. A strong detergent is recommended. Ideal for wall installation and recommended for floor installation in residential areas only.

1

CERTIFICAZIONI
CERTIFICATIONS

EN 14411

Le DOP sono disponibili sul sito internet www.blustyle.it
DOP are available on the website www.blustyle.it

UNI EN ISO 9001:2008



SISTEMA DI GESTIONE
QUALITÀ CERTIFICATO
Sistema di gestione
della qualità siti produttivi
Quality management
system of production sites

UNI EN ISO 14001:2004



SISTEMA DI GESTIONE
AMBIENTALE CERTIFICATO
Sistema di gestione
ambientale siti produttivi
Environmental management
system of production sites



EMAS
GESTIONE AMBIENTALE
VERIFICATA
reg. n. I-000309

STABILIMENTO DI
FINALE EMILIA (MO)



EMAS
GESTIONE AMBIENTALE
VERIFICATA
reg. n. I-000239


STABILIMENTO DI
TOANO (RE)



Blustyle Ceramica, tramite la holding Panariagroup Industrie Ceramiche S.p.A., è membro dello U.S. Green Building Council e del Green Building Council Italia.

Blustyle Ceramica, through Panariagroup Industrie Ceramiche S.p.A. holding, is a member of the U.S. Green Building Council and of the Italian Green Building Council.

“  ”
Ceramics of Italy



COUNTRY

LAND OF WOOD

GRES PORCELLANATO / PORCELAIN STONEWARE

Bla UGL - IMPASTO COLORATO/COLORED BODY - Decorazione/Decoration: INKJET - EFFETTO 3D/INKJET - 3D EFFECT
 Conforme/In compliance with: ISO 13006-G (Group Bla), EN 14411-G (Group Bla), ANSI A137.1 (Porcelain tiles - P1 Class)

COLORI / COLOURS



SPESORE / THICKNESS

10,5 mm

SUPERFICIE / SURFACE


NATURALE

FUGA (DIMENSIONE DISTANZIATORE) - JOINT (SPACER SIZE)

≥ 2 mm

È compito del posatore controllare sempre il materiale prima della posa. Stendere a terra alcune piastrelle (circa 3 mq.) e verificarne accuratamente le specifiche tecniche ed estetiche d'insieme.
 The person in charge of installation must check all material before installing it. Place some tiles on the floor (approx. 3 m²) and check the overall technical and aesthetic characteristics with particular care.

FORMATI E PEZZI SPECIALI SIZES AND SPECIAL PIECES

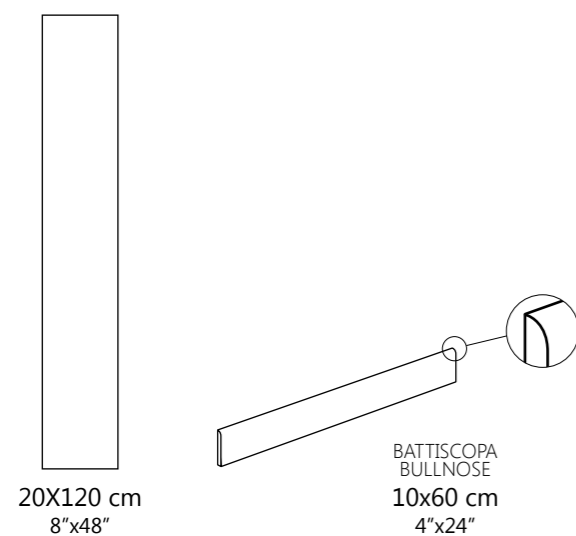


GARANZIA / WARRANTY



20 ANNI RESIDENZIALE E PUBBLICO
20 YEARS RESIDENTIAL AND PUBLIC



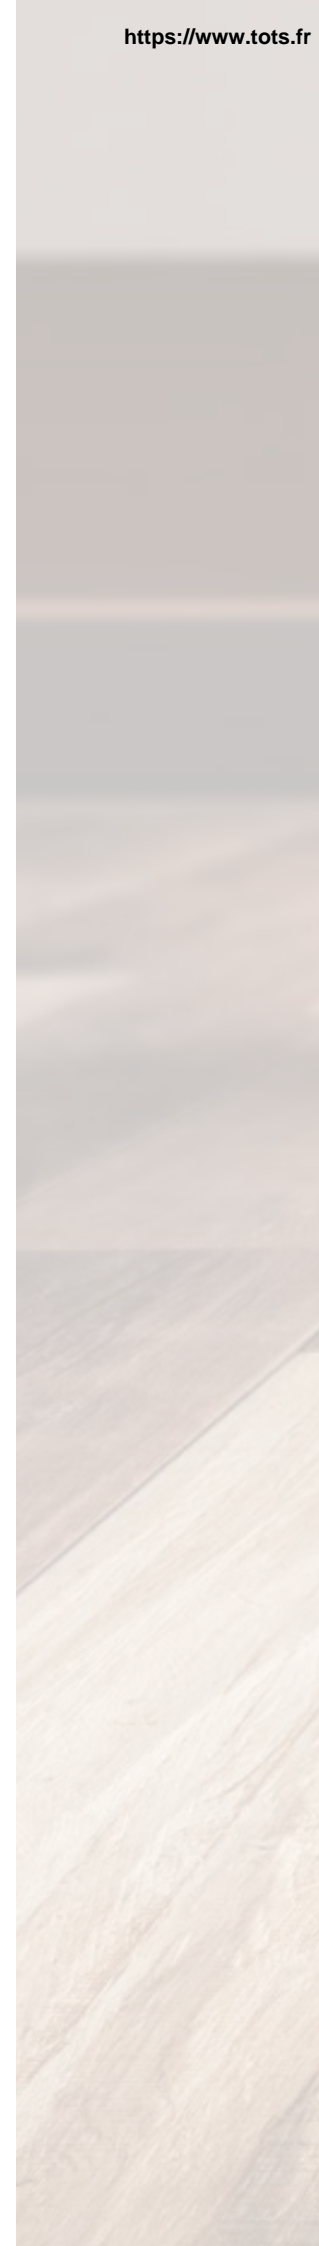

Blustyle[®] | BELLA
by COTTO D'ESTE | PER
SEMPRE

Via Emilia Romagna, 31 - 41049 Sassuolo (MO) Italy
ph. +39 0536 814911 - fax +39 0536 814921
blustyle.it - info@blustyle.it

PANARIAGROUP INDUSTRIE CERAMICHE S.p.A.